


LC 2100


21 LC 750


36 t


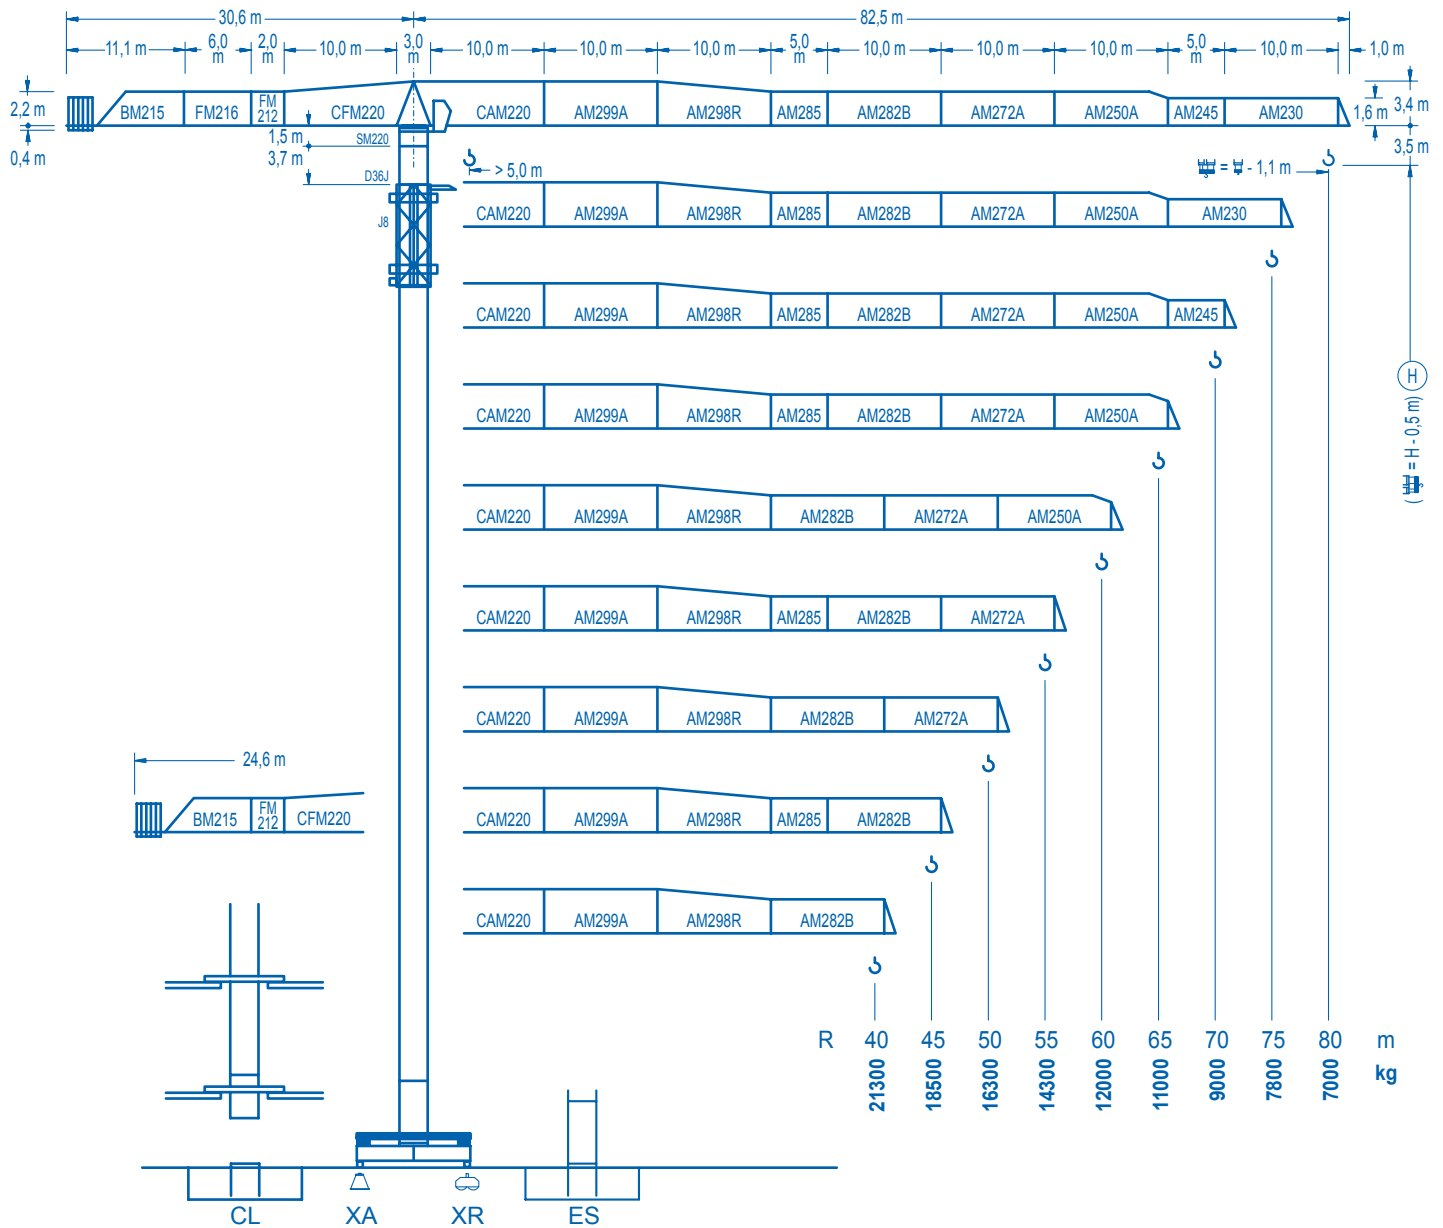


CE EN 14439 (C/25)


R (m)																		
80	18,3 36000	21 30510	23 27310	25 24660	28 21430	32 18110	36 15560	40 13540	43,8 12000	50,7 12000	55 10930	60 9870	65 8980	70 8230	75 7570	80 7000	m kg	
75	18,7 36000	21 31260	23 27990	25 25280	28 21980	32 18590	36 15990	40 13920	44,7 12000	52,0 12000	55 11240	60 10160	65 9250	70 8470	75 7800	m kg		
70	19,5 36000	21 32990	23 29560	25 26710	28 23250	32 19690	36 16960	40 14800	45 12650	46,8 12000	54,7 12000	60 10780	65 9820	70 9000	m kg			
65		21,3 36000	23 32890	25 29760	28 25950	32 22040	36 19040	40 16660	45 14300	50 12430	51,3 12000	60,3 12000	65 11000	m kg				
60			23,3 36000	25 33170	28 28980	32 24670	36 21360	40 18740	45 16140	50 14080	56,4 12000	60 12000	m kg					
55				25,4 36000	28 32050	32 27340	36 23720	40 20860	45 18020	50 15760	55 14300	m kg						
50				25,5 36000	28 32200	32 27470	36 23840	40 20960	45 18110	50 16300	m kg							
45				25,3 36000	28 31920	32 27230	36 23620	40 20760	45 18500	m kg								
40				25,1 36000	28 31650	32 26990	36 23420	40 21300	m kg									





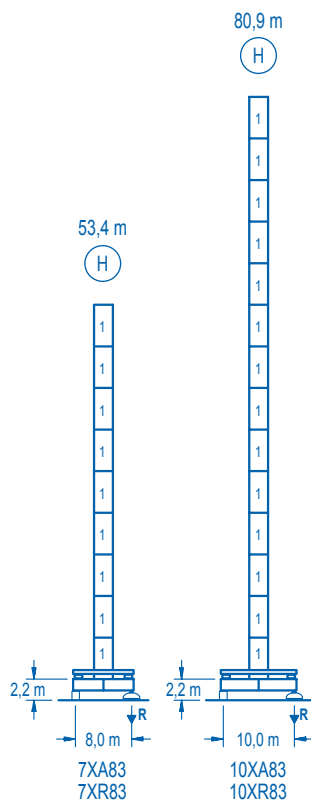

n°	Ref.	h (m)
1	D36	2,5 5,5
2	CLD36	2,5 3,8

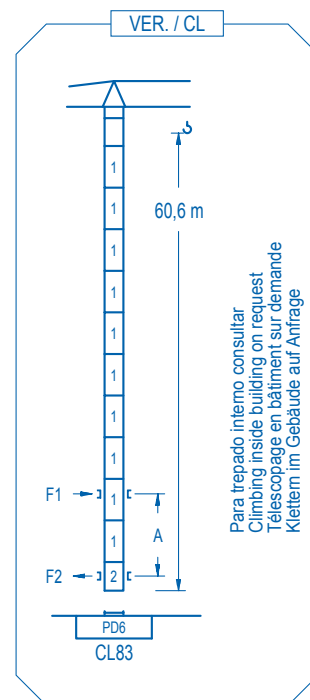

R. m��x.	En servicio In operation En service In Betrieb
7XR83.....	159,6 t
10XR83.....	171,5 t

R. m��x.	Fuera de servicio Out of service Hors service Ausser Betrieb
7XR83.....	106,4 t
10XR83.....	156,1 t

Para otras zonas de viento o alturas superiores consultar
For other wind zones or additional hook heights on request
Pour d'autres zones de vent ou des hauteurs suppl  mentaires sur demande
F  r andere Windzonen oder weiteren Hakenh  hen auf Anfrage

	7XA83	10XA83
A max	40,7	68,2
B max	-	49,5
C max	62,2	62,2
H max	102,9	152,4




	ES83
A max	66,1
B max	-
C max	62,2
H max	128,3

CFU-13
13 kW
0 � 75 m/min

GR-14
4 x 140 Nm
0 � 0,7 rpm

TRA-7.5
4 x 75 Nm
0 � 20 m/min

TRA-7.5VC
4 x 75 Nm
0 � 20 m/min

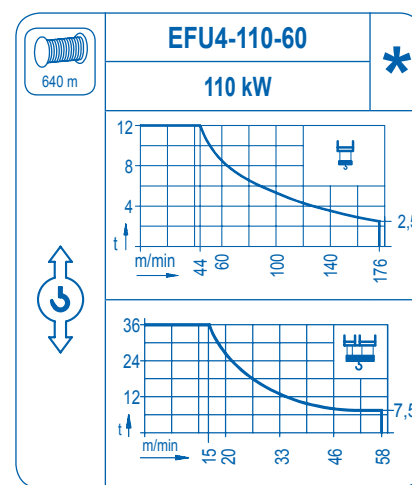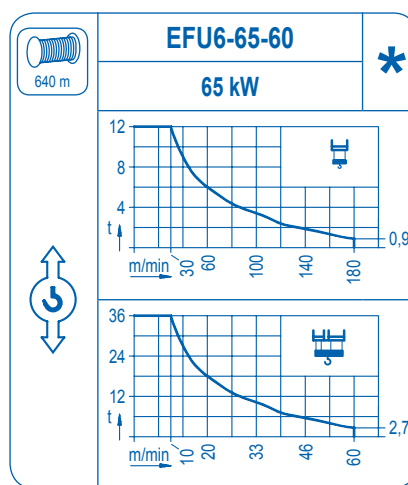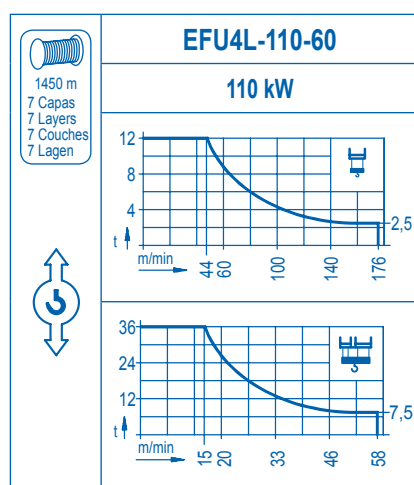

Tensi��n de alimentaci��n Operating voltage Tension de service Betriebsspannung	400 V 3 ph 50 Hz
--	------------------------

Opcional Optional En option Kaufoption	*
---	---



Tel.: (34) 948 335 020
Fax: (34) 948 330 810
e-mail: info@comansa.com
www.comansa.com

Pol  gono Urbizkain
E-31620 HUARTE-PAMPLONA.- SPAIN